
4000–8000 MHz GaN Packaged Power Amplifier — PSAT 43 dBm (typical)

LCI-PA-4000-8000-PS43T · 4000–8000 MHz · GaN Packaged Power Amplifier.



The RF table specifies: PSAT 43 dBm (typical); Power gain 20 dB (typical); PAE 35 % (typical). RF test conditions: Vd = +28 V; Vg = -2.2 V; PW = 100 µs; D = 10%; Pin = 23 dBm.

CMW010B

Apply gate bias before drain bias. Remove drain bias before gate bias.

Vg: C = 10 µF

Vg: 1, 3

RFin: 2

Vd: 4, 6

RFout: 5

Package outline dimensions: 18.03 × 8.7 mm.

RF characteristics

Vd = +28 V; Vg = -2.2 V; PW = 100 µs; D = 10%; Pin = 23 dBm

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating frequency	f	4000	-	8000	MHz
Saturated output power	-	42	43	-	dBm
Power gain	-	19	20	-	dB
Power-added efficiency	-	30	35	-	%
Power-gain flatness	-	-	-	±1	dB

DC bias and current

Parameter	Symbol	Minimum	Typical	Maximum	Value	Unit
Drain voltage	-	-	-	-	28	V
Gate voltage	-	-	-	-	-2.2	V

Absolute limits

Absolute limits; these are not normal operating targets.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Maximum drain-source voltage	-	-	-	32	V
Minimum gate bias	-	-5	-	-	V
Storage temperature	-	-65	-	150	°C
Maximum input power	-	-	-	27	dBm

Package outline dimensions

Parameter	Value	Unit
Package outline dimensions	18.03 × 8.7	mm
Terminal span	14.7	mm


Current publication record · 1.6 · 2026-11-12. Product description or editorial content updated. Replaces revision 1.5.

Integration notes

CMW010B Apply gate bias before drain bias. Remove drain bias before gate bias. Vg: C = 10 µF Vg: 1, 3 RFin: 2 Vd: 4, 6 RFout: 5

Mechanical Outline

Partial drawing showing confirmed dimensions in mm. Use the complete installation drawing for installation.

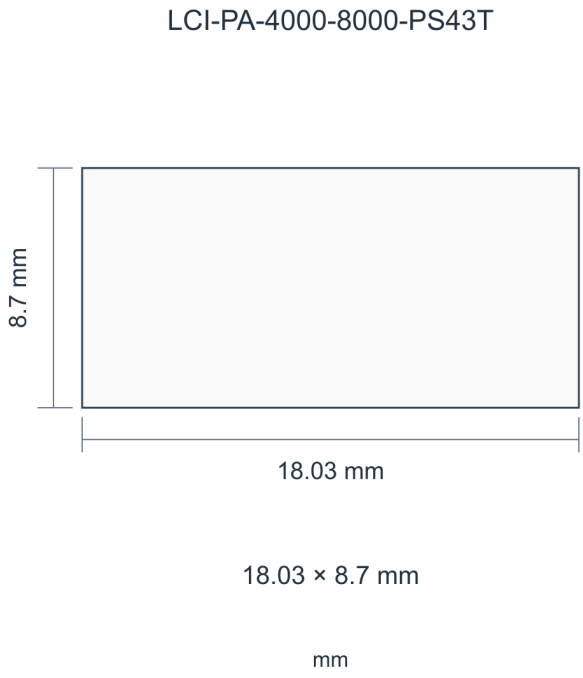



Performance curves


Each performance plot applies to its stated operating conditions.


Pulsed — Saturated output power; Power-added efficiency; Dynamic drain current; Power gain.

Figure notes: Vd=+28V; Vg=-2.2V; Pin=23dBm. Readings are approximate. Pulse width = 100 µs; duty cycle = 10%.

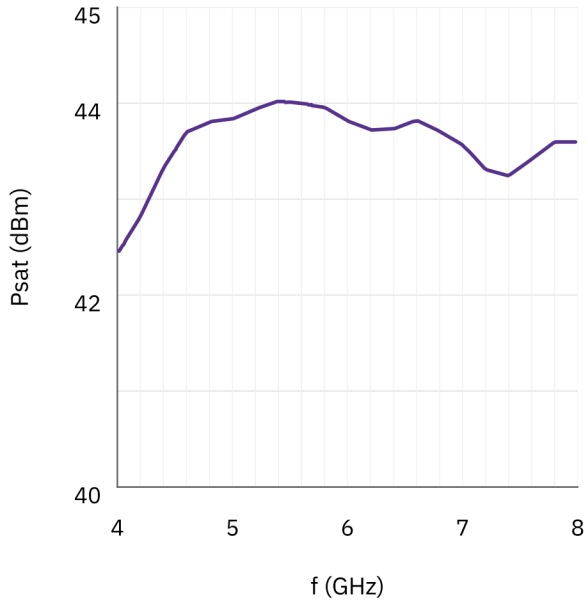

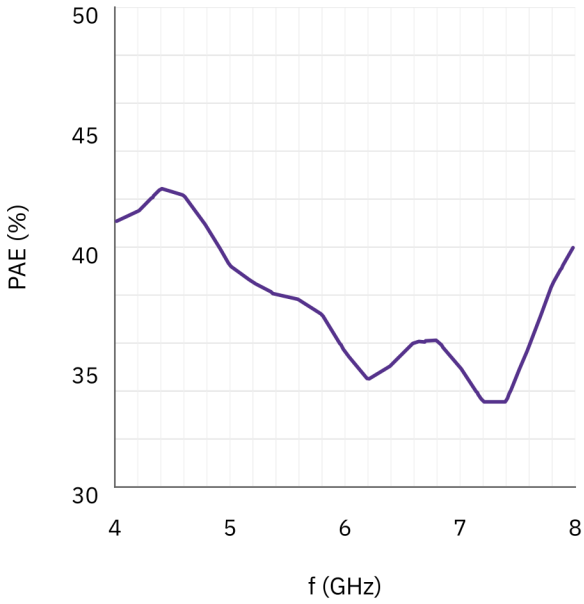

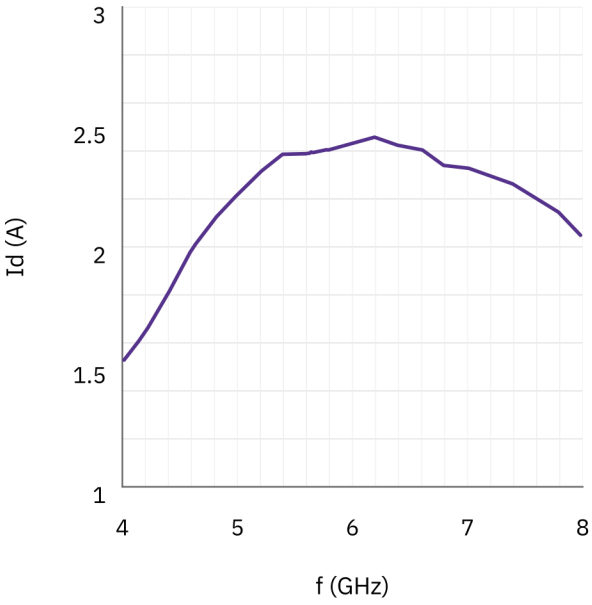

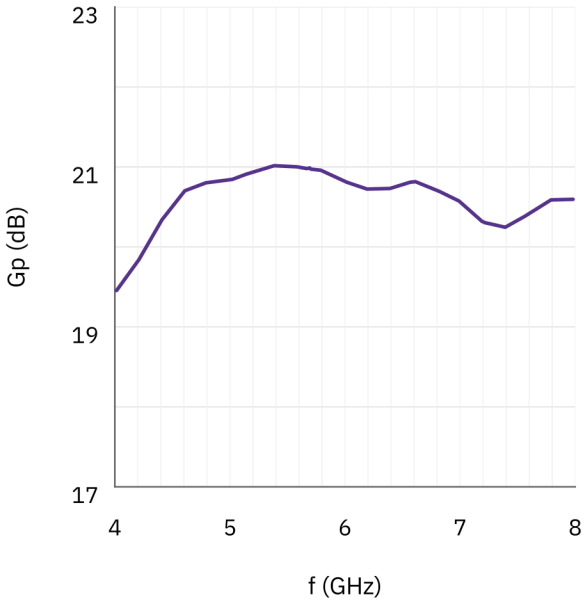

Document notice

Specifications are subject to revision. Before design release, confirm the current document revision and product-specific requirements with LCRF. The approved quotation and order documentation define the supplied configuration.