


The drawing shows the PCB layout with the following dimensions and features:

- Top edge dimensions: 12 (0.47) on the left and 75 (2.95) on the right.
- Right edge dimensions: 69 (2.72) and 12 (0.47).
- Bottom edge dimensions: 69 (2.72) on the left and 44 (1.73) on the right.
- Internal dimensions: 4-02.71 (overall width) and 5 (0.20) (distance from left edge to first internal feature).
- Internal features: A 25V GND pad and an Enable pin are located near the top-left corner.
- Ports: IN and OUT ports are located on the bottom edge.
- Mounting holes: Four circular mounting holes are distributed around the perimeter.

Pin-Nr.	Beschreibung	Spezifikation
-	Positive Versorgung / Masse	+28 VDC / Masse
-	Freigabe	EN = 3.3 V / 5 V → Aktiviert; EN = 0 V → Deaktiviert

Mechanische Maßzeichnung

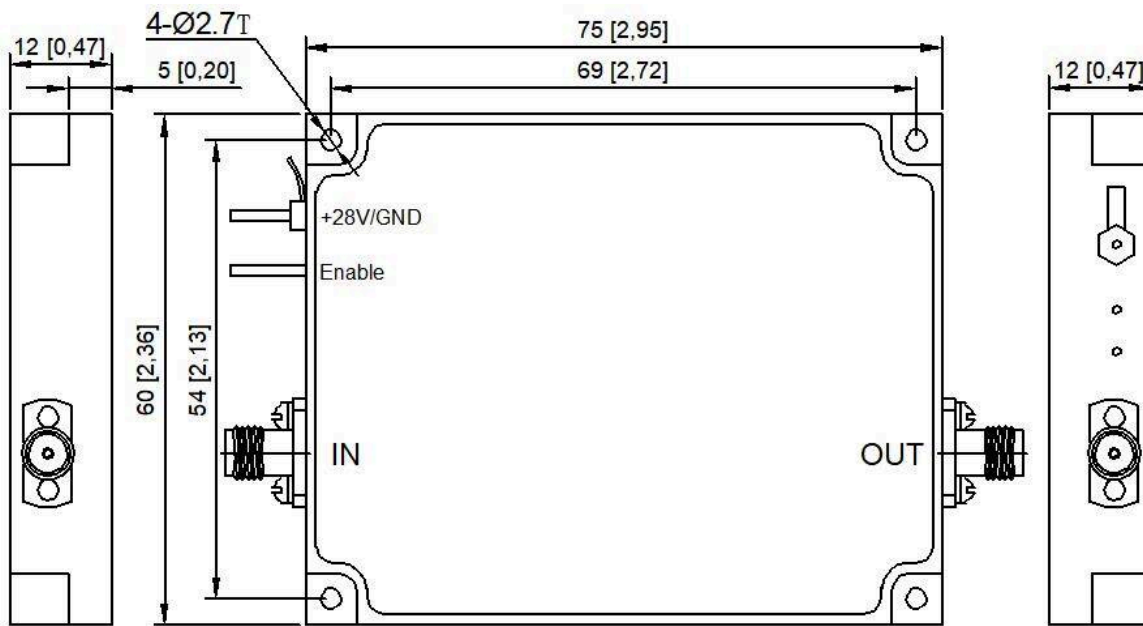

Alle Maße in mm [in].

Dokumenthinweis

Spezifikationen können revidiert werden. Prüfen Sie vor der Designfreigabe mit LCRF den aktuellen Dokumentstand und die produktspezifischen Anforderungen. Das freigegebene Angebot und die Auftragsunterlagen definieren die gelieferte Konfiguration.