

Technical drawing of the 1000x1000x100 mm cabinet showing front, side, and top views with dimensions in mm and inches.

- Front View:** Shows a square cabinet with a width of 1000 [39.37] mm and a height of 1000 [39.37] mm. The top edge has a width of 180 [7.09] mm and a height of 172 [6.77] mm. The bottom edge has a width of 100 [3.94] mm and a height of 100 [3.94] mm. The side edge has a width of 100 [3.94] mm and a height of 100 [3.94] mm. The front panel has a width of 100 [3.94] mm and a height of 100 [3.94] mm.
- Side View:** Shows the side profile of the cabinet with a width of 100 [3.94] mm and a height of 100 [3.94] mm. The side panel has a width of 100 [3.94] mm and a height of 100 [3.94] mm.
- Top View:** Shows the top surface of the cabinet with a width of 1000 [39.37] mm and a height of 1000 [39.37] mm. The top panel has a width of 1000 [39.37] mm and a height of 1000 [39.37] mm.


Specifiche ambientali · Obiettivi di progetto; conferma richiesta per l'applicazione

Parametro	Minimo	Tipico	Massimo	Unità
Temperatura operativa	-20	-	50	°C
Temperatura di stoccaggio	-25	-	65	°C
Umidità relativa (senza condensa)	-	-	95	%

Specifiche meccaniche

Parametro	Valore	Unità
Dimensioni	180 × 120 × 25[7.09 × 4.72 × 0.98] (Massimo)	mm [in]
Peso	2[4.4] (Massimo)	kg [lb]
Connettore ingresso RF	SMA femmina	-
Connettore uscita RF	N femmina	-
Interfaccia DC/controllo	D-Sub ibrido maschio a 7 contatti	-

Disegno dimensionale meccanico

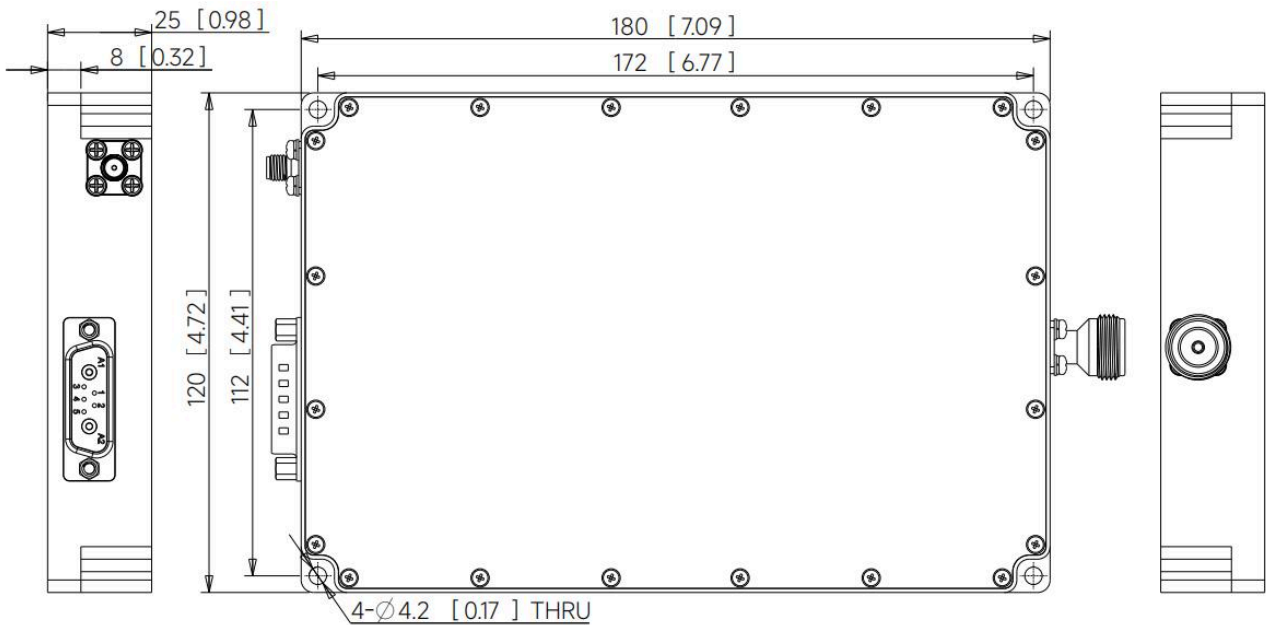

Tutte le dimensioni sono espresse in mm [in].

Interfaccia DC e controllo

Pin n.	Descrizione	Specifica
A1	GND	Massa
A2	VDD	+28 VDC
1	ENABLE	Livello TTL alto (3.3 V); polarizzazione interna a livello basso
2	GND	Massa
3	485A	Comunicazione seriale RS-485
4	485B	Comunicazione seriale RS-485
5	NC	Non collegato

Pubblicazione corrente · 1.0 · 2026-10-07. Prima pubblicazione dei dati di prodotto approvati.

Nota sul documento

Le specifiche possono essere revisionate. Prima di finalizzare il progetto, confermare con LCRF la revisione corrente e i requisiti specifici del prodotto. L'offerta approvata e la documentazione d'ordine definiscono la configurazione fornita.