7000–10000 MHz GaAs MMIC Passive Double-Balanced Mixer Die

LCI-MIX-7000-10000-D is a GaAs pHEMT passive double-balanced mixer bare die for the RF band 7000–10000 MHz, with separate RF, LO and IF ports.

Conversion loss: 8.5 dB (typical); LO power: 14 dBm; Operating frequency (IF): 1400 MHz (minimum) / 3000 MHz (maximum) / 1400–3000 MHz. Die dimensions: 1.6 × 0.9 × 0.1 mm.



RF characteristics

TA = +25 °C

Parameter	Symbol	Minimum	Typical	Maximum	Value	Unit
Operating frequency	-	7000	-	10000	7000–10000 (RF)	MHz
Operating frequency (LO)	-	5000	-	9000	-	MHz
Operating frequency (IF)	-	1400	-	3000	-	MHz
Conversion loss	-	-	8.5	-	-	dB
Isolation (LO / RF)	-	-	35	-	-	dB
Isolation (LO / IF)	-	-	40	-	-	dB
Isolation (RF / IF)	-	-	15	-	-	dB
Input power at 1 dB compression	-	-	13	-	-	dBm
LO power	-	-	-	-	14	dBm

Absolute limits

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Maximum input power	-	-	-	25	dBm

Environmental specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage temperature	-	-65	-	150	°C

Bond-pad assignments

Pins	Symbol	Function	Notes
1	LO	Local oscillator port	-
2	RF	RF port	-
3	IF	IF port	-
4–9	GND	Ground pad for probe testing	-

Die dimensions

Parameter	Value	Unit
Die dimensions	1.6 × 0.9 × 0.1	mm

Reference drawing showing selected dimensions in mm. Use complete drawings for fabrication and wire bonding.

LCI-MIX-7000-10000-D



1.600 × 0.900 × 0.100 mm
X, Y: ±0.100 mm
X → · Y ↑ · X, Y: mm

Current publication record · 1.8 · 2026-11-12. Product description or editorial content updated. Replaces revision 1.7.

Performance curves

Read each figure with its stated operating conditions.

Port matching; Conversion loss; Isolation; IF response.

Readings are approximate. +25 °C; CL↓ / CL↑: IF = 1.4 GHz; CL(fIF): LO = 14 dBm.

RF → IF

IF = 1.4 GHz

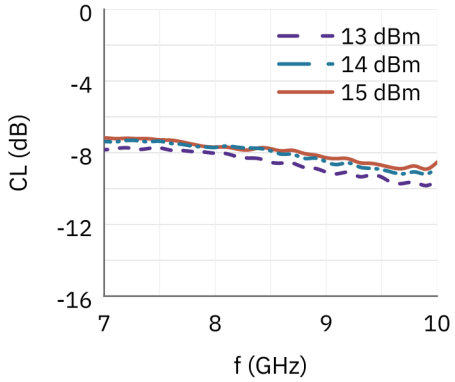

CL-IF

LO = 14 dBm

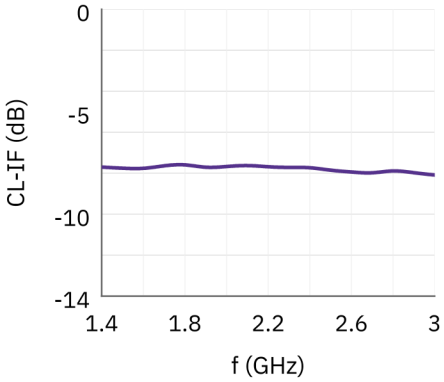

IF → RF

IF = 1.4 GHz

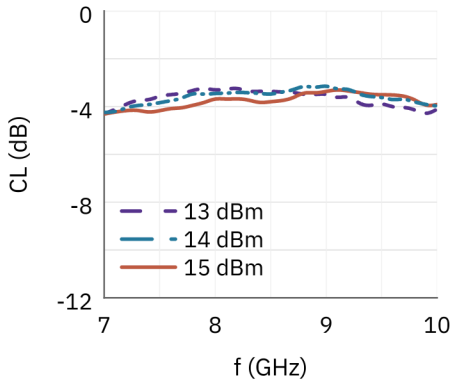

ISO

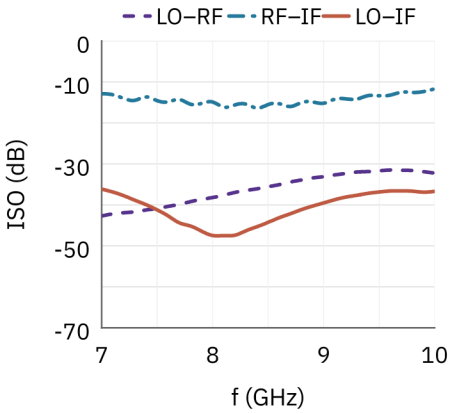

RL (RF, LO)

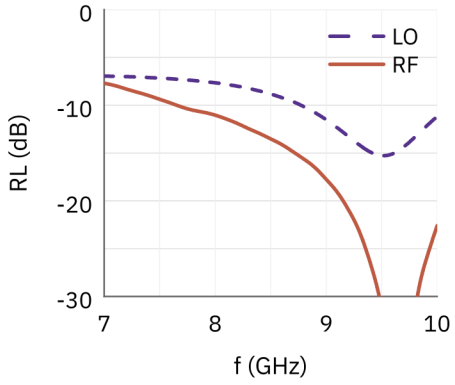

RL-IF

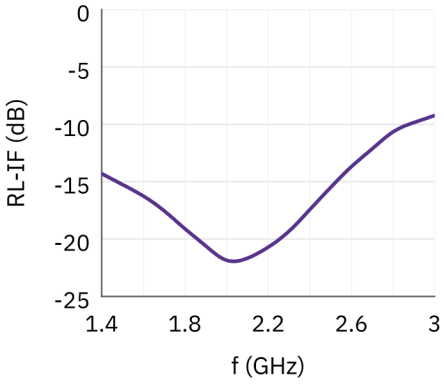

Input power at 1 dB compression.

Figure notes: +25 °C. Readings are approximate.

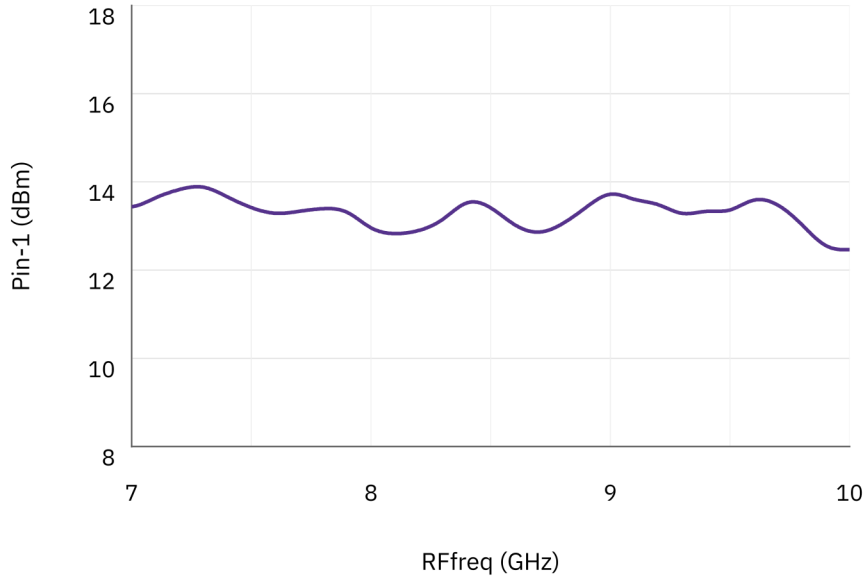

Document notice

Specifications are subject to revision. Before design release, confirm the current document revision and product-specific requirements with LCRF. The approved quotation and order documentation define the supplied configuration.