
92000–96000 MHz MMIC Power Amplifier Die

LCI-PA-92000-96000-PS34T is a MMIC power amplifier supplied as bare die for 92000–96000 MHz.

PSAT: 34 dBm (typical); PAE: 10 % (typical); Small-signal gain: 19 dB (typical). Die dimensions: 4.5 × 2.6 × 0.05 mm.



RF characteristics

TA = +25 °C; Vd = +18 V; Id = 1.2 A

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating frequency	f	92000	-	96000	MHz
Small-signal gain	S21	-	19	-	dB
Small-signal gain flatness	ΔS21	-	±1	-	dB
Saturated output power	Psat	-	34	-	dBm
Power-added efficiency	PAE	-	10	-	%
Input VSWR	VSWR(in)	-	1.8	-	-
Output VSWR	-	-	1.8	-	-
Saturation current	-	-	1.4	-	A

DC bias and current

Parameter	Symbol	Minimum	Typical	Maximum	Value	Unit
Drain voltage [1]	Vd	-	-	-	18	V
Gate voltage [2]	Vg	-	-	-	-1.7	V
Bias current [3]	-	-	-	-	0.6	A

[1] Id = 0.6 A; Value stated without a Min/Typ/Max qualification.

[2] Vd = +18 V; Id = 0.6 A; Value stated without a Min/Typ/Max qualification.

[3] Vd = +18 V; Vg = -1.7 V; Value stated without a Min/Typ/Max qualification.

Absolute limits

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Maximum drain-source voltage	Vd	-	-	20	V
Minimum gate bias	Vg	-5	-	-	V
Maximum input power	Pin	-	-	28	dBm
Storage temperature	TSTG	-65	-	150	°C

Environmental specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating temperature	-	-55	-	85	°C

Die dimensions

Parameter	Value	Unit
Die dimensions	4.5 × 2.6 × 0.05	mm

Current publication record · 1.8 · 2026-11-12. Product description or editorial content updated. Replaces revision 1.7.


Die integration and bias sequencing

Separate characterization: TA = +25 °C; Vd = +18 V; Id = 0.6 A. Apply gate bias before drain bias. Remove drain bias before gate bias.

Mechanical Outline

Outline and dimensioned coordinates in mm. Use this drawing as a dimensional reference. Fabrication and wire bonding require complete drawings.

LCI-PA-92000-96000-PS34T

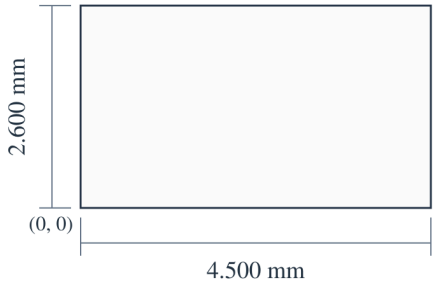

X (mm)
Vg: 0.480
(4/6): 2.510
(5/7): 3.310

Y (mm)
RFin: 1.465
RFout: 1.135


4.500 × 2.600 × 0.050 mm
X, Y: ±0.050 mm
X → · Y ↑ · X, Y: mm


Performance curves


Each performance plot applies to its stated operating conditions.


Small-signal gain; Input matching; Output matching; Output power; Power-added efficiency; Drain current.


Figure notes: TA=+25°C; Vd=18V; Id=600mA. Readings are approximate. Pout / PAE / Id: Pin = 22 dBm. Idq = 720 / 580 / 460 / 350 mA. Use the drain current shown in each trace's legend.

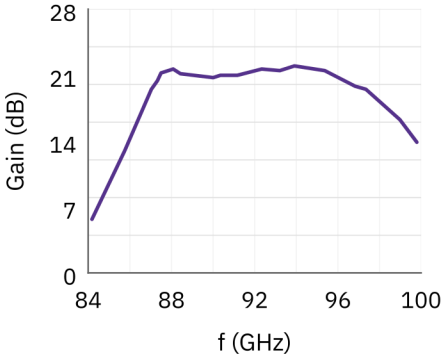


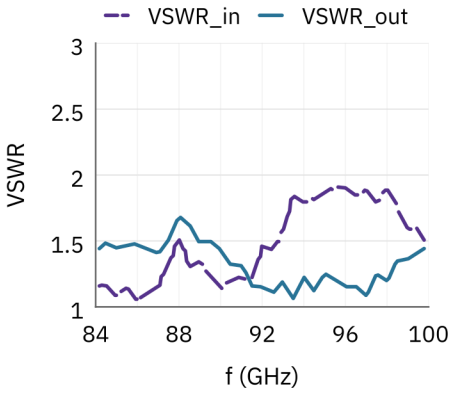

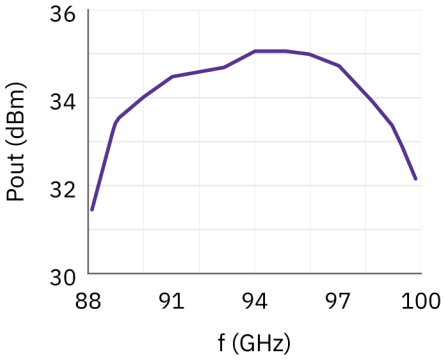

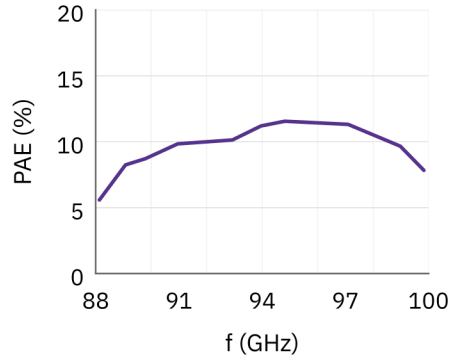

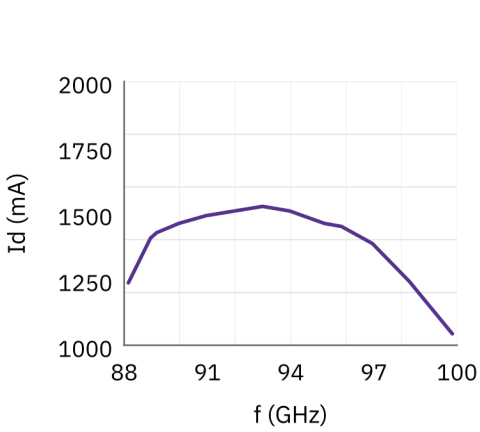

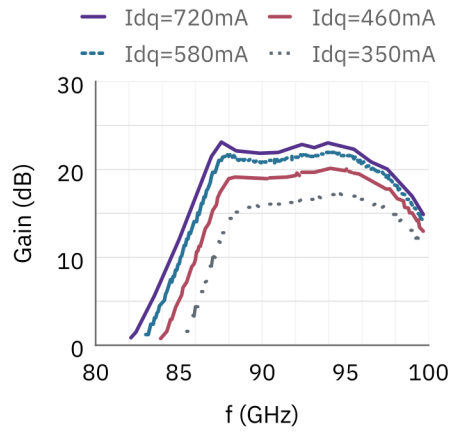

Document notice

Specifications are subject to revision. Before design release, confirm the current document revision and product-specific requirements with LCRF. The approved quotation and order documentation define the supplied configuration.