


500 MHz–2.5 GHz 30 W Minimum Broadband RF Power Amplifier Module

This 500–2500 MHz module specifies 30 W minimum saturated output and 45 dB minimum gain. Current at 30 W is 3.8 A typical; gain flatness is ±1.5 dB typical.

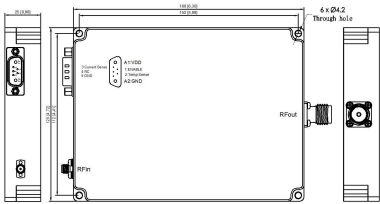

Electrical Specifications · +28.0 VDC, 25 °C, 50 Ω system unless otherwise stated; Input power 0 dBm

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating frequency	BW	500	-	2500	MHz
Saturated RF output power	Pout	30	-	-	W
Power gain	Gp	45	-	-	dB
Power gain flatness	Gp	-	±1.5	-	dB
VSWR	S11	-	-	2	-
Harmonics at 30 W	H	-	-12	-	dBc
Spurious signals	Spur	-	-60	-	dBc
Input/output impedance	Impedance	-	50	-	Ω
Operating voltage	VDC	24	28	32	VDC
Power-added efficiency	Eff	-	35	-	%
Current consumption at Pout = 30 W	IDD	-	3.8	-	A

Monitoring and Protection

Parameter	Specification
Monitoring	Voltage, current, temperature and open/short-circuit detection
Over-temperature protection	Amplifier shutdown above 85 °C
Supply protection	Shutdown above 32 V, below 24 V, or with accidental reverse wiring

Absolute Maximum Ratings · Exceeding these ratings may damage the module

Parameter	Rating
RF input drive without damage	+10 dBm
Load VSWR at Pout = 30 W	5:1 at all load phases, continuous
Thermal overload	85 °C shutdown


Environmental Specifications · Design targets; project confirmation required

Parameter	Minimum	Typical	Maximum	Unit
Operating temperature	-20	-	50	°C
Storage temperature	-25	-	65	°C
Relative humidity (non-condensing)	-	-	95	% RH

Mechanical Specifications

Parameter	Value	Unit
Dimensions	160 × 120 × 25[6.30 × 4.72 × 0.98] (Maximum)	mm [in]
Weight	1[2.2] (Typical)	kg [lb]
RF input connector	SMA female	-
RF output connector	N-K female	-
DC/control interface	Hybrid D-Sub 7-pin male	-

Mechanical Outline

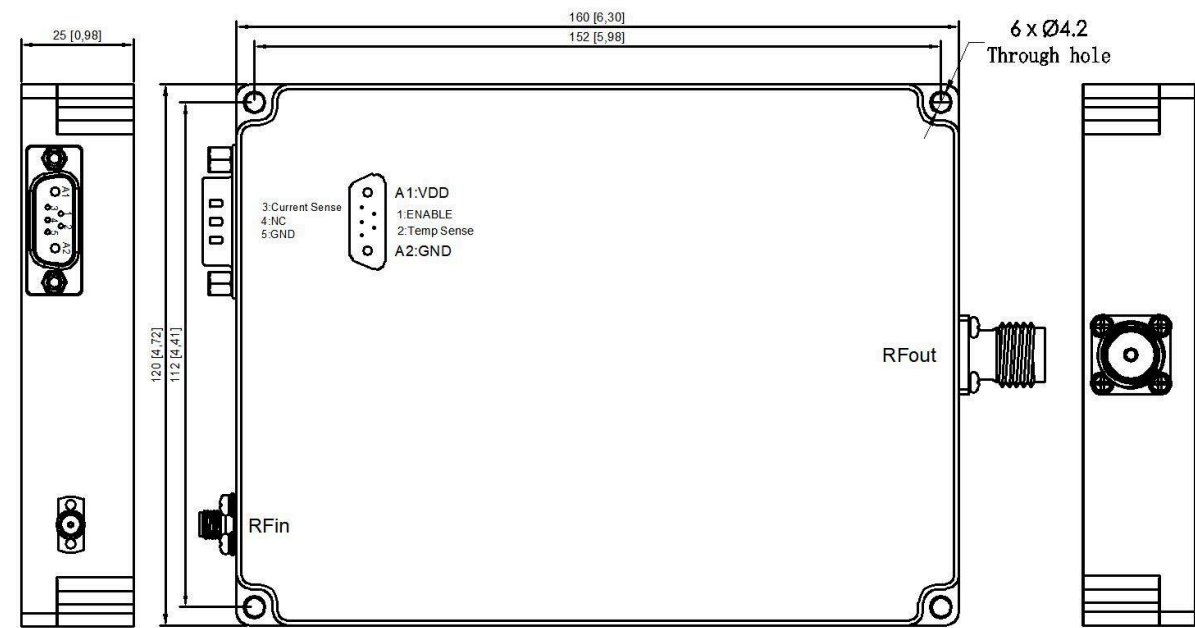

All dimensions are in mm [in].

DC and Control Interface

Pin #	Description	Specification
A1	A1 VDD	28VDC
A2	A2 GND	Ground
1	1 ENABLE	TTL logic high (3.3 V); internally pulled low
2	2 — Temperature sense output	750 ±20 mV @ 25 °C; 10 mV/°C
3	3 — Current sense output	100 mV/A
4	4 NC	Not connected
5	5 GND	Ground

Document notice

Specifications are subject to revision. Before design release, confirm the current document revision and product-specific requirements with LCRF. The approved quotation and order documentation define the supplied configuration.